Sl. No.	Items grouped under sub-Heads and Sub-Works of the Estimate Description	Unit
1	KSRRB 2-1.1: Earthwork in surface excvation in ordinary soil for levelling and lowerng the ground manually (other than foundation of buildings, culverts road drains and trenches of pipe lines and cables) and removing the excavated stuff to a distance not exeeding 50m and lift upto 1.5m, excavated stuff to a distance not exceeding 50m and lift upto 1.5m excavated syrface levelled and neatly dressed, disposed earth to be levelled after breaking of clods and neatly dressed as per specifications.(Pg No.5.Item No.2.1)	Cum
2	KSRB 4-1.3: Providing and laying in position plain cement concrete of nominal mix 1:4:8 using 40mm and down size graded granite metal machine mixed, conrete laid in layers not exceeding 15 cms. Thick well compacted in foundation and plinth, including cost of all materials labour, HOM of machinery, curing complete as per specification . (Pg.No.12, It.4.3)	Cum
3	KSRB 4-1.6: Providing and laying in position plain cement concrete of mix 1:2:4 with cement @ 240 kgs with 20mm and down size graded granite metal coarse aggregates @ 0.878 cum and fine aggregates @ 0.53cum, machine mixed concrete laid in layers not exceeding 15cms thick well compacted in foundation plinth and cills including cost of all materials, labour HOM of machinery curing complete as per specifications.(Item No.4.6, Page No.12)	Cum
4	Providing and fixing litter bins at selected locations. (Approved rate- approved copy attached)	
5		Nos
6	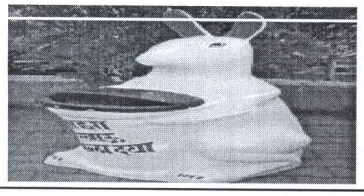	Nos
7		Nos
8	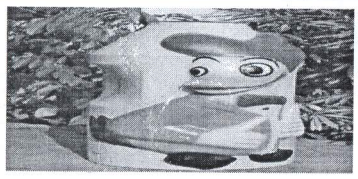	Nos
	Total	
	Add 11% K.R.I.D.L Charges	
	Total	

CRTIFICATE:

1. Certified that the above work done satisfactory and no materials issued from Department

AE (HQ)